


Stock#: US4700

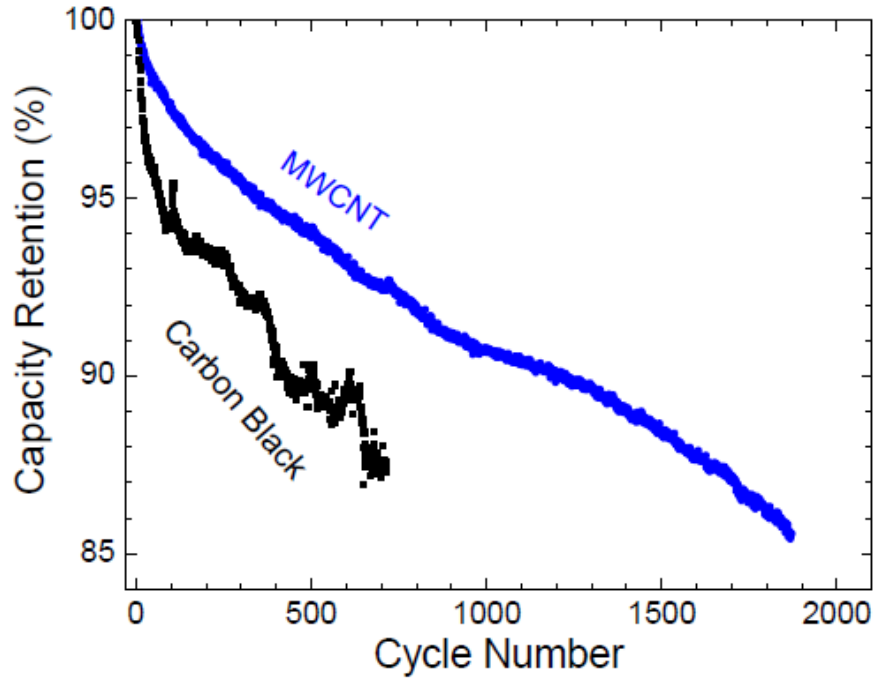

Measurement conditions:

Temperature: 25 °C

Humidity: 45% RH

Charge: 0 to 4.2 V at 1C

Discharge: 4.2 to 2.75 V at 1C

Capacity Retention VS. Cycle Number for CNT/LiCoO₂ Electrode