




Remove 3 bolts from sand pipe mounting at # 3 & 4 wheel location as shown. 3<sup>rd</sup> bolt hidden from view. Leaving one bolt tight to hold the sand pipe assembly



1. Install applicator assembly over sand pipe assembly
2. Ensure proper length bolts are used, aligning assembly to wheel when tightening
3. Check for proper alignment of applicator to wheel when assembly is secure

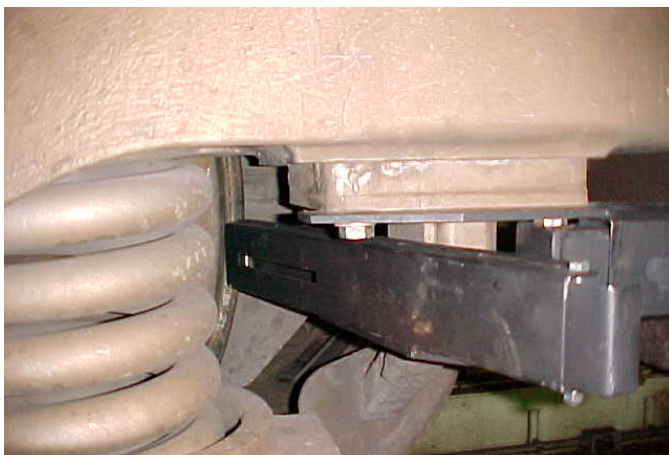

Set brakes to move wheel toward end of applicator and ensure clearance of  $\frac{3}{4}$ " to wheel.



Install lube stick into magazine. Before replacing retainer inspect spring to ensure applied properly on retainer. Insert retainer into guide slots in magazine and replace pin



Ensure retainer/spring assembly is inserted into guide slots in magazine.



Make adjustments to wheel as shown, loosen bolt and slide in or out for proper adjustment.

## MPL 4450 Applicator Installation GE C44-9W locomotives