


# MODELS 5, 10, 5L, 10L

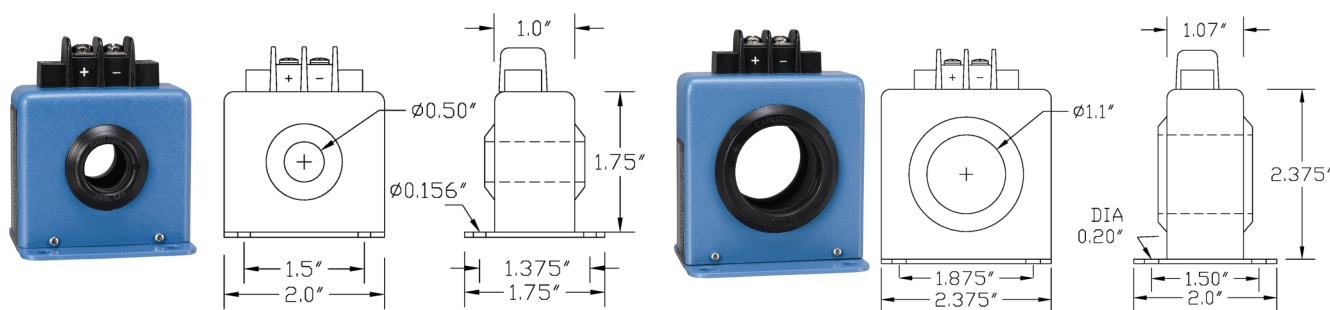

## Models 5 & 10

**STANDARD CURRENT RANGES** *A.C. Amps, RMS*

**0-10, 20, 30, 50, 75, 100**

## Models 5L & 10L

**STANDARD CURRENT RANGES** *A.C. Amps, RMS*

**0-50, 100, 150, 200, 250, 300**

## PERFORMANCE SPECIFICATIONS *with Optimum Load Resistance*

Accuracy	0.5% (Standard)
Repeatability	0.25% Full Scale
Response Time	150 Milliseconds Maximum
<b>Temperature Range</b>	<b>-25°C to 85°C</b>
Temperature Coefficient	0.04% F.S./ °C
Frequency	Nominal 50/60 Hz

## OUTPUT SPECIFICATIONS

Voltage	0-5 V.D.C Models 5 & 5L / 0-10 V.D.C. Models 10 & 10L
Impedance	10K Ohms Max Models 5 & 10 / 5K Ohms Max Models 5L & 10L
Ripple	Less than 3% Full Scale

## ADDITIONAL SPECIFICATIONS

Max Weight (unit)	5 oz. Models 5 & 10 / 8 oz. Models 5L & 10L
-------------------	---------------------------------------------



Manufacturer maintains right to change specifications without notice.

[WWW.KISCURRENTSENSORS.COM](http://WWW.KISCURRENTSENSORS.COM)

[info@kiscurrentsensors.com](mailto:info@kiscurrentsensors.com)

Toll Free: 800.258.9751

Fax: 281.492.0150